


|  |                                |                                |
|--|--------------------------------|--------------------------------|
| <b>Last Modified:</b> 7-13-2007  |                                | 1.6 A                          |
| <b>Service Category:</b> Vehicle Exterior                                      | <b>Section:</b> Lighting (ext) |                                |
| <b>Model Year:</b> 2008  | <b>Model:</b> ES350            | <b>Doc ID:</b> RM000002DXF002X |
| <b>Title:</b> LIGHTING: HIGH MOUNTED STOP LIGHT ASSEMBLY: REMOVAL (2008 ES350) |                                |                                |

## REMOVAL

### 1. REMOVE CENTER STOP LIGHT SET

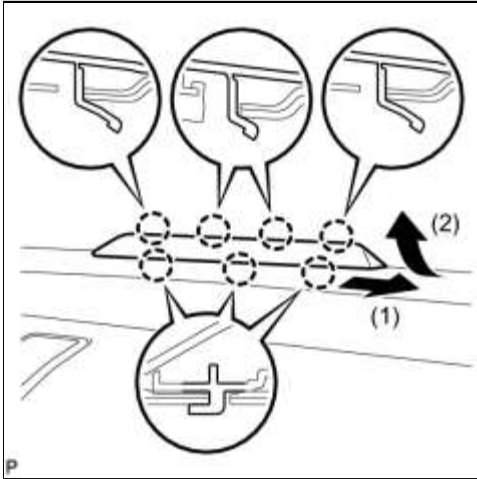

(a) Disengage the 7 claws and disconnect the center stop light set as shown in the illustration.

(b) Disconnect the connector and remove the center stop light set.

