



**Technical Service  
Information Bulletin**

October 11, 2007

Title:  
**LIFTING PROCEDURE**

Models:  
**'07 – '08 ES 350**

# TSIB


**PRODUCT GENERAL INFORMATION  
PG005-07**

**Introduction** The purpose of this TSIB is to prevent possible damage to the rocker cladding and lower door molding. The following procedure outlines the correct method for using a lift to raise a 2007 – 2008 model year ES 350.

**Applicable Vehicles**

- 2007 – 2008 model year ES 350.

**Support  
Location  
Overview**

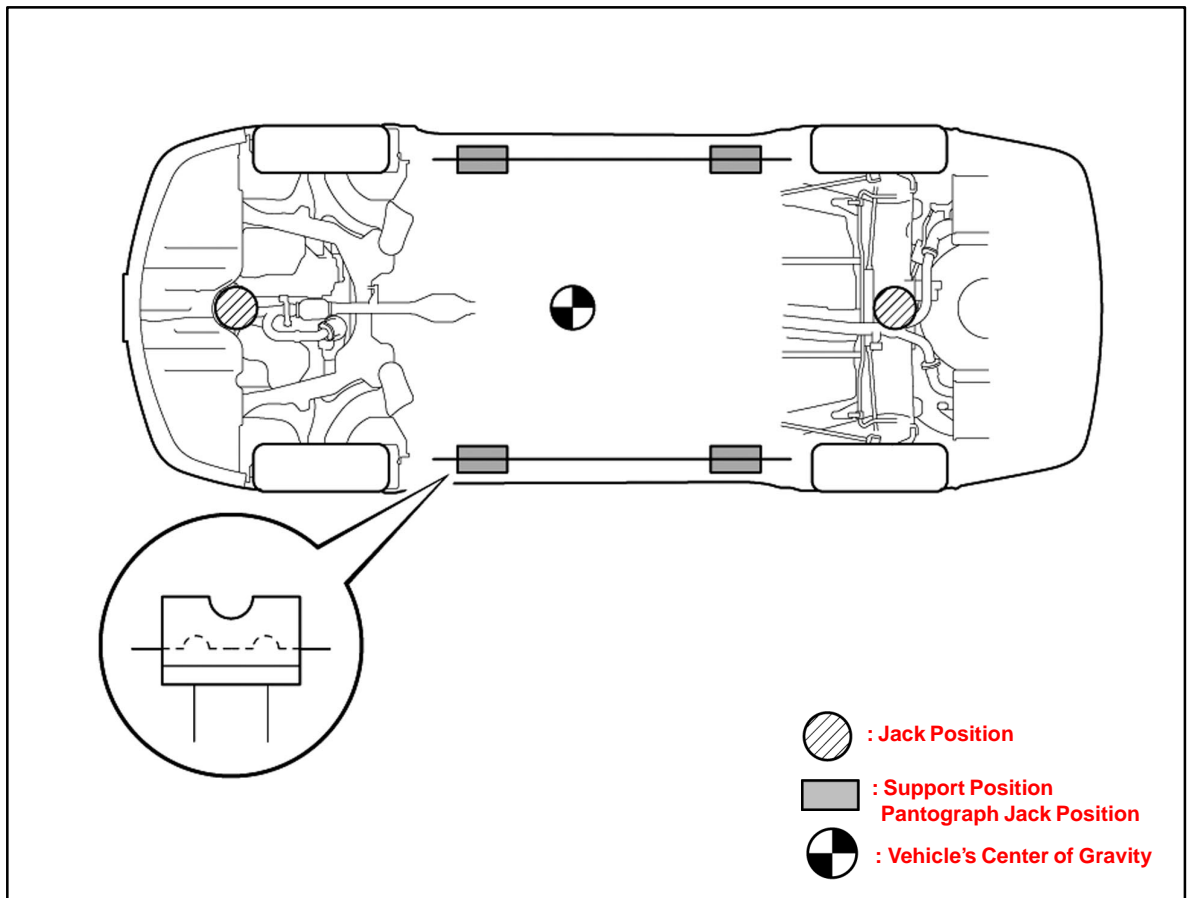

**Warranty  
Information**

OP CODE	DESCRIPTION	TIME	OFF	T1	T2
N/A	Not Applicable to Warranty	–	–	–	–



**Lifting  
Procedure****Using swing arm type lift:**

1. Follow the instruction manual of the lift for a safe operation.
2. Use a cradle with a rubber attachment, as shown in the Specified Location Overview in this TSIB.
3. Position the vehicle so that it is centered on the lift.
4. Ensure that rubber cushions or swing arms do not contact the cladding or the lower door moldings.
5. Lift the vehicle up until the tires are off the ground, and shake the vehicle to make sure that it is stable.

**Using plate type lift:**

1. Follow the instruction manual of the lift for a safe operation.
2. Use a plate lift attachment.
3. Be sure to set the vehicle to the specified position.

SPECIFIED POSITION	SPECIAL INSTRUCTIONS
Right and left set position	Place the vehicle over the center of the lift
Front and rear set position	Align the cushion ends of the plate with the attachment lower ends (A and C) Align the attachment upper end (B) with the rocker flange front side notch

4. Ensure that rubber cushions or swing arms do not contact the cladding or the lower door moldings.
5. Lift the vehicle up until the tires are off the ground, and shake the vehicle to make sure that it is stable.

Specified  
Location  
Overview

