


# FOG LAMP LAMP UNIT LH


## REPLACEMENT

650P6-02

1. REMOVE RADIATOR SUPPORT SEAL UPPER (See page 16-9)
2. REMOVE FRONT BUMPER GUARD (See page 76-2)
3. REMOVE FRONT FENDER LINER RH (See page 76-2)
4. REMOVE FRONT FENDER LINER LH (See page 76-2)
5. REMOVE FRONT BUMPER COVER (See page 76-2)

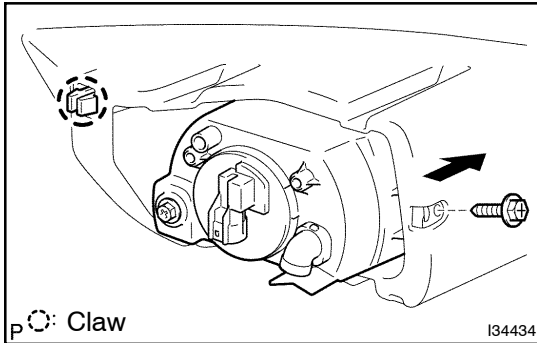

6. REMOVE FOG LAMP LAMP UNIT LH
  - (a) Remove the screw.
  - (b) Disengage the claw and remove the fog lamp assy.

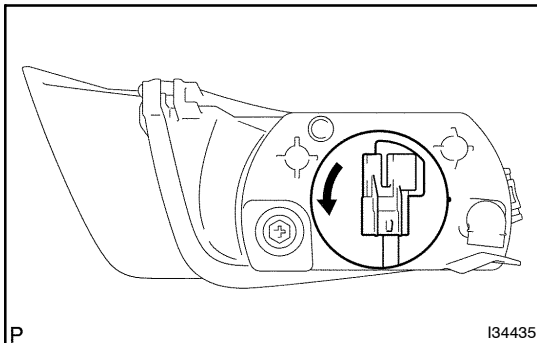

- (c) Remove the fog lamp cover and the fog lamp bulb.

7. INSTALL FRONT FENDER LINER RH (See page 76-2)
8. INSTALL FRONT FENDER LINER LH (See page 76-2)
9. PUT VEHICLE THESE CONDITIONS (See page 65-15)
10. ADJUST FOG LIGHT AIM (See page 65-15)