



Last Modified: 5-25-2010	6.4 K	From: 200907
Model Year: 2010	Model: HS250H	Doc ID: RM000003MUJ00AX
Title: LIGHTING (INT): VANITY LIGHT: COMPONENTS (2010 HS250H)		

COMPONENTS

ILLUSTRATION

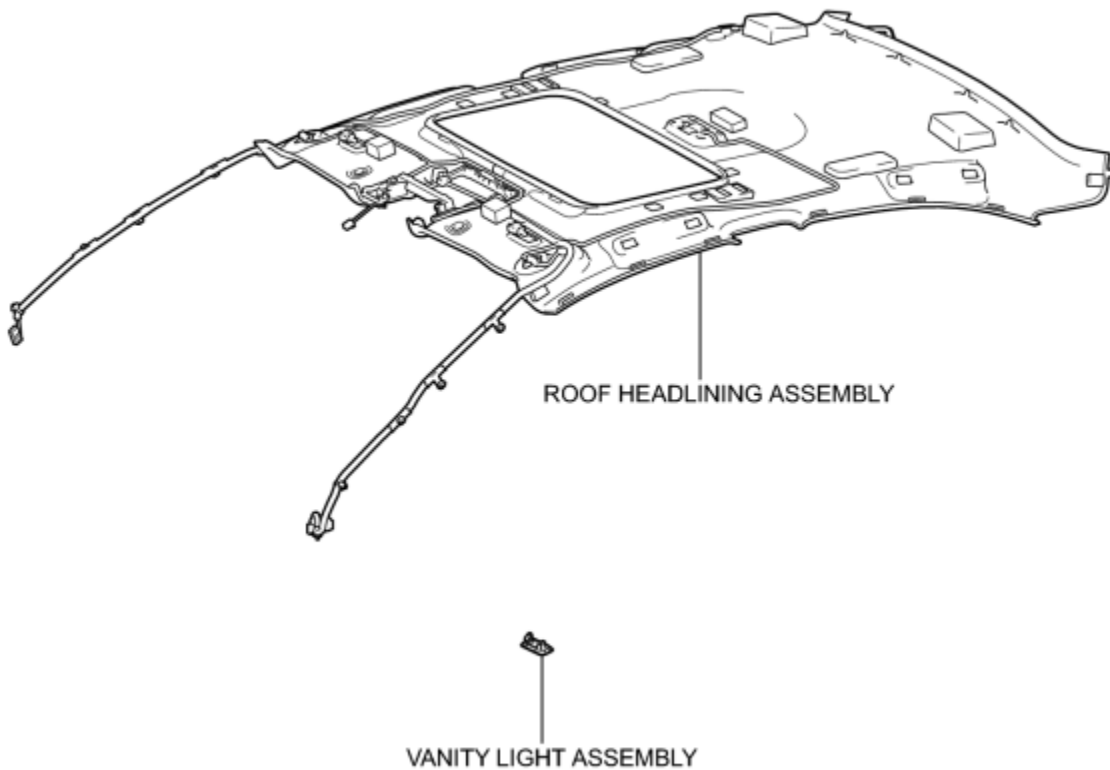

Last Modified: 5-25-2010	6.4 A	From: 200907
Model Year: 2010	Model: HS250H	Doc ID: RM000003MV500AX
Title: LIGHTING (INT): VANITY LIGHT: REMOVAL (2010 HS250H)		


REMOVAL

1. REMOVE ROOF HEADLINING ASSEMBLY

(a) Remove the roof headlining assembly .

2. REMOVE VANITY LIGHT ASSEMBLY


(a) Tilt the tab to disengage the 2 claws <A> and separate the bulb holder from the vanity light as shown in the illustration.

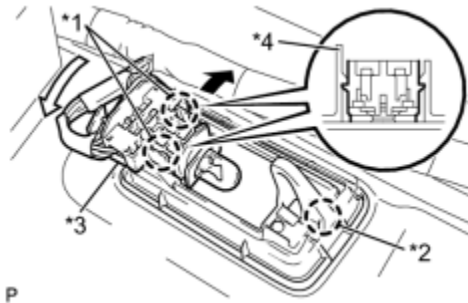

Text in Illustration

	Claw <A>
*1	
*2	Claw
*3	Bulb Holder
*4	Tab


(b) Disengage the claw and remove the vanity light assembly.



Last Modified: 5-25-2010	6.4 A	From: 200907
Model Year: 2010	Model: HS250H	Doc ID: RM000003MV400AX
Title: LIGHTING (INT): VANITY LIGHT: INSTALLATION (2010 HS250H)		

INSTALLATION

1. INSTALL VANITY LIGHT ASSEMBLY

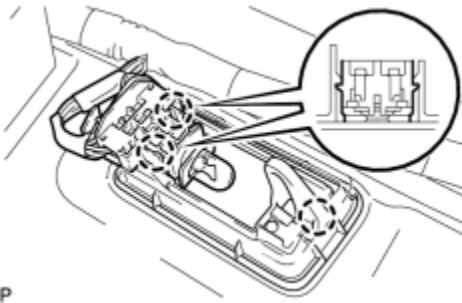

(a) Engage the 3 claws and install the vanity light assembly.

P

2. INSTALL ROOF HEADLINING ASSEMBLY

(a) Install the roof headlining assembly [INFO](#).

