


COMBINATION METER ASSEMBLY

1. Major Difference

The following design elements and functions of the combination meter assembly have been changed.

Item		Change
Design		<ul style="list-style-type: none"> The panel color has been changed from silver to black. The speedometer and tachometer rings have been plated. The AFS OFF indicator light has been discontinued
Function	Multi-switch Mode Function	The display for the AFS ON/OFF function has been discontinued.
	Warning Mode Function	<ul style="list-style-type: none"> A CHECK HEADLIGHT SYSTEM message has been added. (Models with automatic headlight leveling system) A LOW OIL PRESSURE symbol has been added to the display. (Destination package for Canada)
Buzzer		Hill-start Assist Control warning has been added.

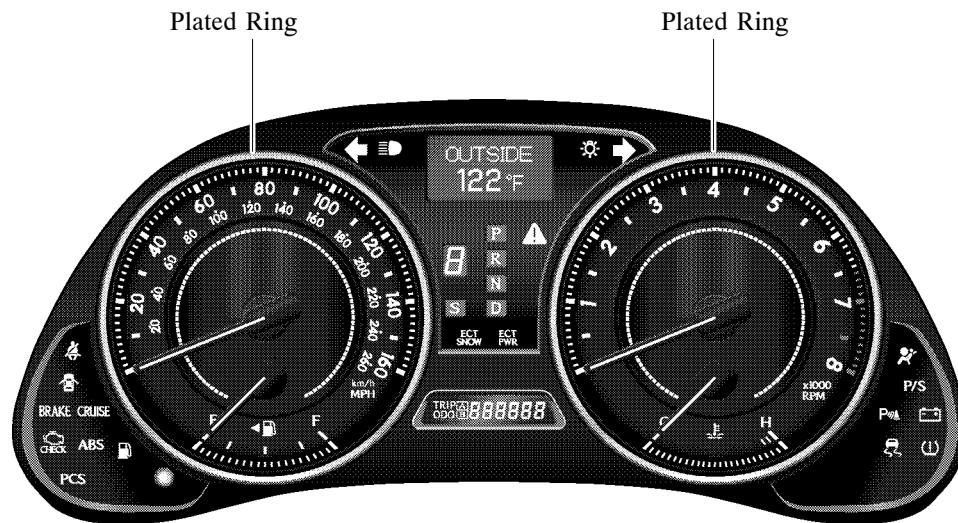

Models for U.S.A.

1660NF16C

2. Multi-information Display

Multi-switch Mode

In the multi-switch mode, various switch functions can be displayed and changed using the satellite switch (RH switch, ON/OFF switch, LH switch).

- When the power source is IG-ON and while driving at 5 km/h (3 mph) or less (or stopped), the switch function can be displayed. However, the SONAR switch can be displayed regardless of the vehicle speed.
- The switch functions displayed are changed in the order shown below using the satellite switch (RH switch, LH switch). The function can be set using the ON/OFF switch.
- The display automatically returns to the previous display 6 seconds after the satellite switch is operated. It will return to the previous display immediately if the DISP switch is operated.

► Display Order ◀

