


BODY DIMENSION DRAWINGS

ENGINE COMPARTMENT

(Three-Dimensional Distance)

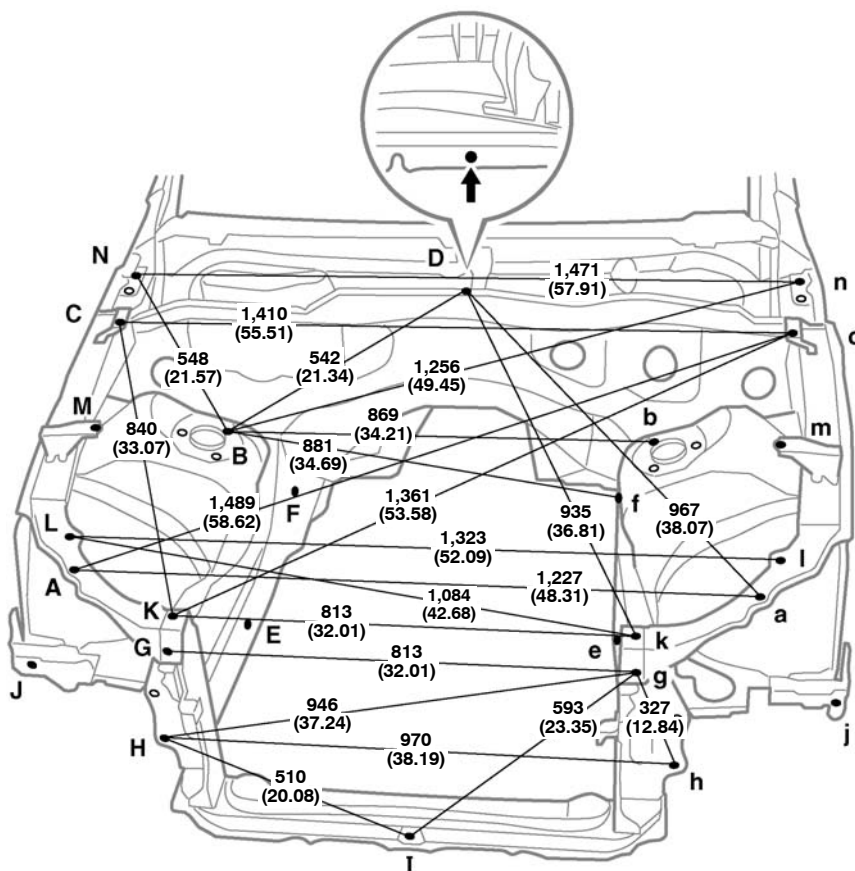

Vehicle Dimensions

A-C or a-c	A-N or a-n	A-n or a-N	C-N or c-n	C-n or c-N	D-E or D-e	D-f or D-F	J-j
698 (27.48)	915 (36.02)	1,625 (63.98)	221 (8.70)	1,457 (57.36)	803 (31.61)	614 (24.17)	1,501 (59.09)

Height From Imaginary Standard Line

A, a	K, k	N, n
628 (24.72)	611 (24.06)	745 (29.33)

K-N or k-n	K-n or k-N	L-N or l-n	L-n or l-N	M-m	M-N or m-n	M-n or m-N
1,053 (41.46)	1,518 (59.76)	815 (32.09)	1,616 (63.62)	1,328 (52.28)	561 (22.09)	1,507 (59.33)

HINT: For symbols, capital letters indicate right side of vehicle, small letters indicate left side of vehicle (seen from rear).

mm (in.)

Symbol	Name	Hole dia.	Symbol	Name	Hole dia.
A, a	Front fender installation nut	M6 (0.24)	I	Hood lock support brace installation nut	M6 (0.24)
B, b	Front spring support hole inner-rear	ø 13 (0.51)	J, j	Radiator support to front fender bracket standard hole	ø 10 (0.39)
C, c	Front fender installation nut	M6 (0.24)	K, k	Radiator upper support installation nut	M6 (0.24)
D	Cowl top inner panel center mark	—	L, l	Radiator upper front support standard hole	ø 10 (0.39)
E, e	Front side member standard hole	ø 15 (0.59)	M, m	Front fender installation nut	M6 (0.24)
F, f	Front side member standard hole	ø 15 (0.59)	N, n	Hood hinge installation nut-rear	M8 (0.31)
G, g	Radiator upper support installation nut	M6 (0.24)	—	—	—
H, h	Crush box installation nut	M14 (0.55)			