


**UNDER BODY
2WD**

(Three-Dimensional Distance)

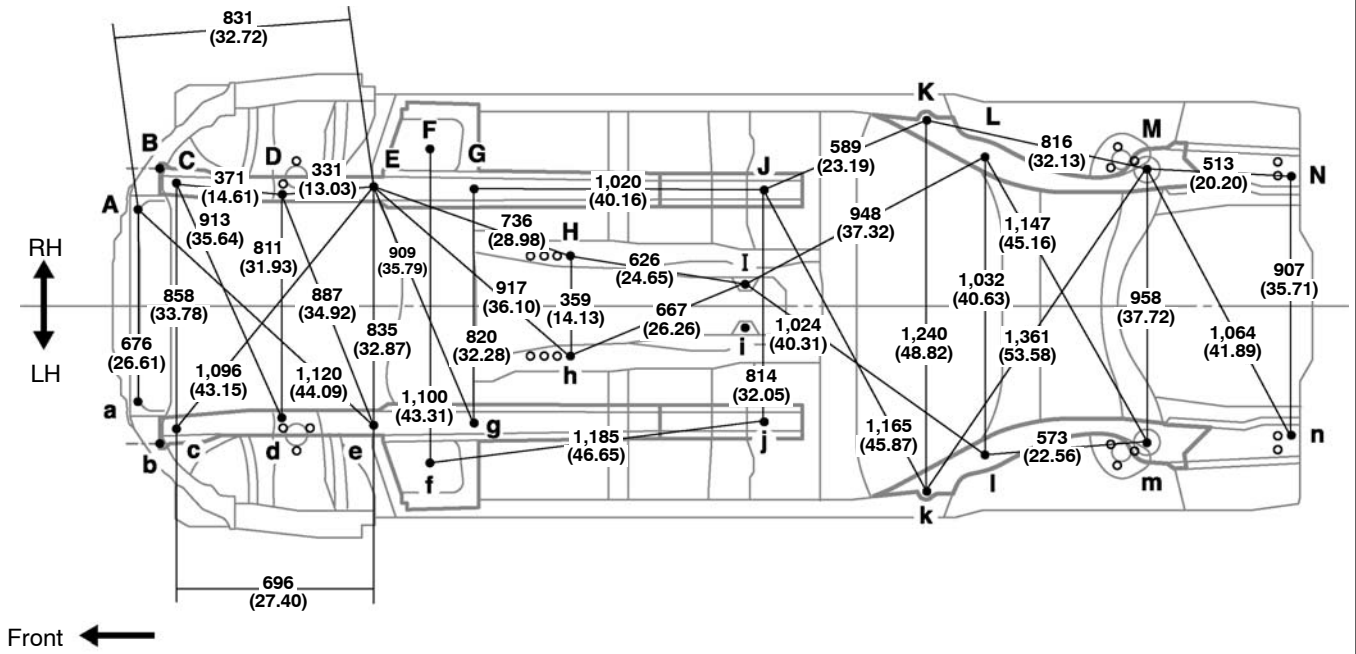


Vehicle Dimensions

B-b	C-F or c-f	C-f or c-F	E-G or e-g	F-j or f-J	G-j or g-J
970 (38.19)	915 (36.02)	1,335 (52.56)	376 (14.80)	1,516 (59.69)	1,306 (51.42)

Height From Imaginary Standard Line

1	2	3
100 (3.94)	100 (3.94)	100 (3.94)

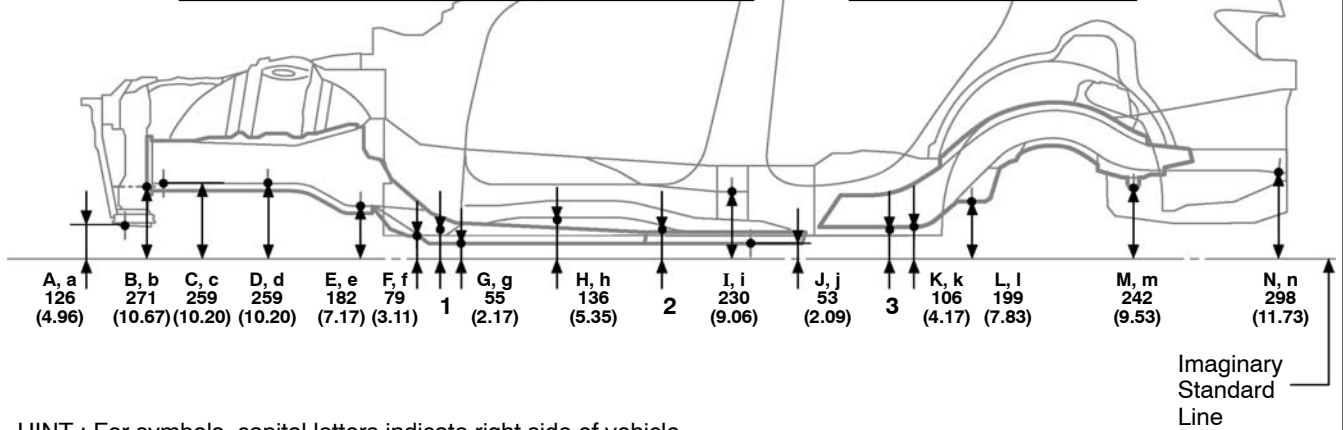

HINT : For symbols, capital letters indicate right side of vehicle, small letters indicate left side of vehicle (seen from rear).

mm (in.)

Symbol	Name	Hole dia.	Symbol	Name	Hole dia.
A, a	Front crossmember standard hole	ø 10 (0.39)	I, i	Propeller shaft center support bearing installation nut	M10 (0.39)
B, b	Crush box installation nut	M10 (0.39)	J, j	Front floor under reinforcement standard hole	ø 15 (0.59)
C, c	Front side member standard hole	ø 18 (0.71)	K, k	Rear floor side member standard hole	ø 18 (0.71)
D, d	Front suspension crossmember installation nut-front	M14 (0.55)	L, l	Rear suspension member installation nut-front	M14 (0.55)
E, e	Front suspension crossmember installation nut-rear	M16 (0.63)	M, m	Rear suspension member installation nut-rear	M14 (0.55)
F, f	Torque box front standard hole	ø 25 (0.98)	N, n	Muffler support bracket installation nut	M12 (0.47)
G, g	Front side member standard hole	ø 25 (0.98)	—	—	—
H, h	Engine rear mounting member installation nut	M10 (0.39)			