

Lubrication system

Oil capacity (Drain and refill — reference*) with filter	
2WD models	8.6 L (9.1 qt., 7.6 Imp. qt.)
AWD models	9.0 L (9.5 qt., 7.9 Imp. qt.)
without filter	8.4 L (8.9 qt., 7.4 Imp. qt.)

\*: The engine oil capacity is a reference quantity to be used when changing the engine oil. Warm up and turn off the engine, wait more than 5 minutes, and check the oil level on the dipstick.

■ Engine oil selection

“Toyota Genuine Motor Oil” is used in your Lexus vehicle. Lexus recommends the use of approved “Toyota Genuine Motor Oil”. Another motor oil of matching quality can also be used.

Oil grade:


0W-20, 5W-20, 5W-30 and 10W-30:

API grade SL “Energy-Conserving”, SM “Energy-Conserving”, SN “Resource-Conserving” or ILSAC multigrade engine oil

15W-40 and 20W-50:

API grade SL, SM or SN multigrade engine oil

Recommended viscosity (SAE):

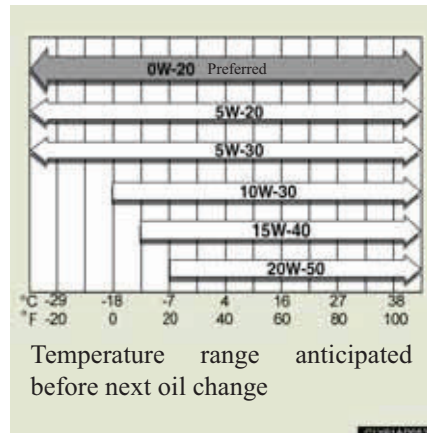

SAE 0W-20 is filled into your Lexus vehicle at manufacturing, and the best choice for good fuel economy and good starting in cold weather.


If SAE 0W-20 oil is not available, SAE 5W-30 oil may be used. However, it should be replaced with SAE 0W-20 at the next oil change.

If you use SAE 10W-30 or a higher viscosity engine oil in extremely low temperatures, the engine may become difficult to start, so SAE 5W-30 or lower viscosity engine oil is recommended.

Oil viscosity (0W-20 is explained here as an example):

- The 0W in 0W-20 indicates the characteristic of the oil which allows cold startability. Oils with a lower value before the W allow for easier starting of the engine in cold weather.
- The 20 in 0W-20 indicates the viscosity characteristic of the oil when the oil is at high temperature. An oil with a higher viscosity (one with a higher value) may be better suited if the vehicle is operated at high speeds, or under extreme load conditions.

## GAS STATION INFORMATION

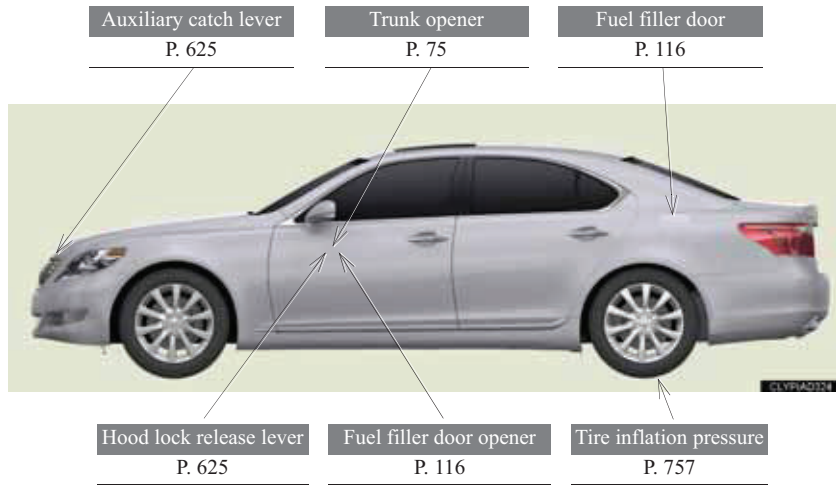

Fuel tank capacity (Reference)	84 L (22.2 gal., 18.4 Imp. gal.)	
Fuel type	P. 117, 749	
Cold tire inflation pressure	P. 757	
Engine oil capacity (Drain and refill — reference)	With filter	L (qt., Imp. qt.)
	2WD models	8.6 (9.1, 7.6)
	AWD models	9.0 (9.5, 7.9)
	Without filter	8.4 (8.9, 7.4)
Engine oil type	Toyota Genuine Motor Oil or equivalent Oil grade: P. 750 0W-20, 5W-20, 5W-30 and 10W-30: API grade SL “Energy-Conserving”, SM “Energy-Conserving”, SN “Resource-Conserving” or ILSAC multigrade engine oil 15W-40 and 20W-50: API grade SL, SM or SN multigrade engine oil Recommended oil viscosity: SAE-0W-20	