

INSTALLATION [10/2014 -]**PROCEDURE****1. INSTALL FRONT BUMPER SIDE RETAINER LH**

- a. Attach the 2 claws to install the front bumper side retainer LH.
- b. Install the clip.
- c. Install the 2 screws.

2. INSTALL FRONT BUMPER SIDE RETAINER RH**HINT:**

Use the same procedure described for the LH side.

3. INSTALL FRONT BUMPER REINFORCEMENT SUB-ASSEMBLY

- a. Install the front bumper reinforcement sub-assembly with the 6 bolts.
Torque: 34 N*m (347 kgf*cm, 25 ft.*lbf)

4. INSTALL FRONT BUMPER SIDE MOUNTING BRACKET ASSEMBLY LH


- a. Install the front bumper side mounting bracket assembly LH with the 6 bolts.
Torque: 50 N*m (510 kgf*cm, 37 ft.*lbf)


5. INSTALL FRONT BUMPER ENERGY ABSORBER

- a. Install the front bumper energy absorber.

6. INSTALL FRONT BUMPER COVER

- a. Connect the No. 3 engine room wire connector.
- b. Connect the 2 fog clearance connectors.
- c. Connect the 2 fog light connectors.
- d. w/ Headlight Cleaner System:
 - a. Connect the headlight washer hose.
- e. Attach the 6 claws to install the front bumper cover.



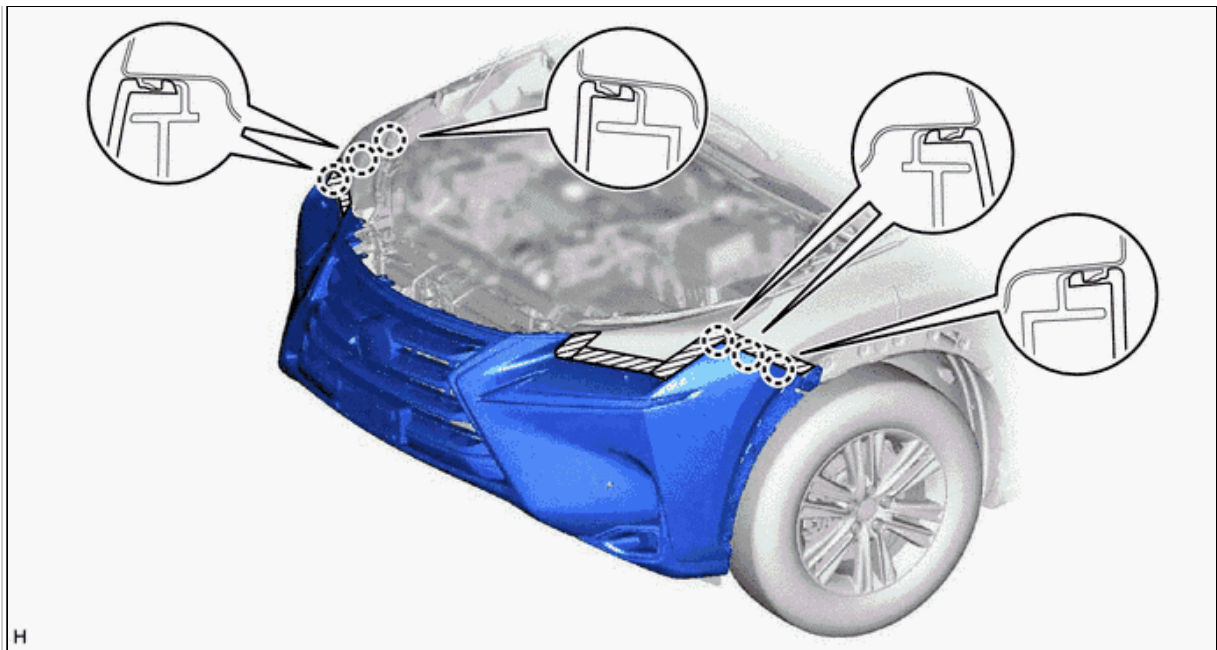

H

Courtesy of © TOYOTA, LICENSE AGREEMENT TMS1002

f. Install the 2 clips.

g. Install the 2 bolts.

h. Install the 2 clips.

i. Install the 4 bolts.

7. INSTALL FRONT FENDER FRONT SPLASH SHIELD LH

a. Install the front fender front splash shield LH with the 5 screws.

8. INSTALL FRONT FENDER FRONT SPLASH SHIELD RH

HINT:

Use the same procedure described for the LH side.

9. INSTALL NO. 1 MOULDING TAPE

Refer to REASSEMBLY [10/2014 -]

10. INSTALL NO. 2 MOULDING TAPE

Refer to REASSEMBLY [10/2014 -]

11. INSTALL FRONT FENDER MOULDING SUB-ASSEMBLY LH

Refer to INSTALLATION [10/2014 -]

12. INSTALL FRONT FENDER MOULDING SUB-ASSEMBLY RH

HINT:

Use the same procedure described for the LH side.

13. INSTALL RADIATOR GRILLE PROTECTOR

a. Install the 2 radiator grille protectors.

14. INSTALL RADIATOR SUPPORT OPENING COVER

- a. Install the radiator support opening cover with the 10 clips.

15. ADD WINDSHIELD WASHER FLUID (w/ Headlight Cleaner System)

- a. Add windshield washer fluid to the washer jar.

16. ADJUST FOG LIGHT AIMING

Refer to ADJUSTMENT [10/2014 -]