

Last Modified: 12-20-2022	6.11:8.1.0	Doc ID: RM1000000020HZG
Model Year Start: 2022	Model: NX250	Prod Date Range: [11/2021 -]
Title: EXTERIOR PANELS / TRIM: REAR DOOR OUTSIDE MOULDING: REMOVAL; 2022 - 2023 MY NX250 NX350 NX350H [11/2021 -]		

REMOVAL


CAUTION / NOTICE / HINT

HINT:




- Use the same procedure for the RH side and LH side.
- The following procedure is for the LH side.

CAUTION / NOTICE / HINT

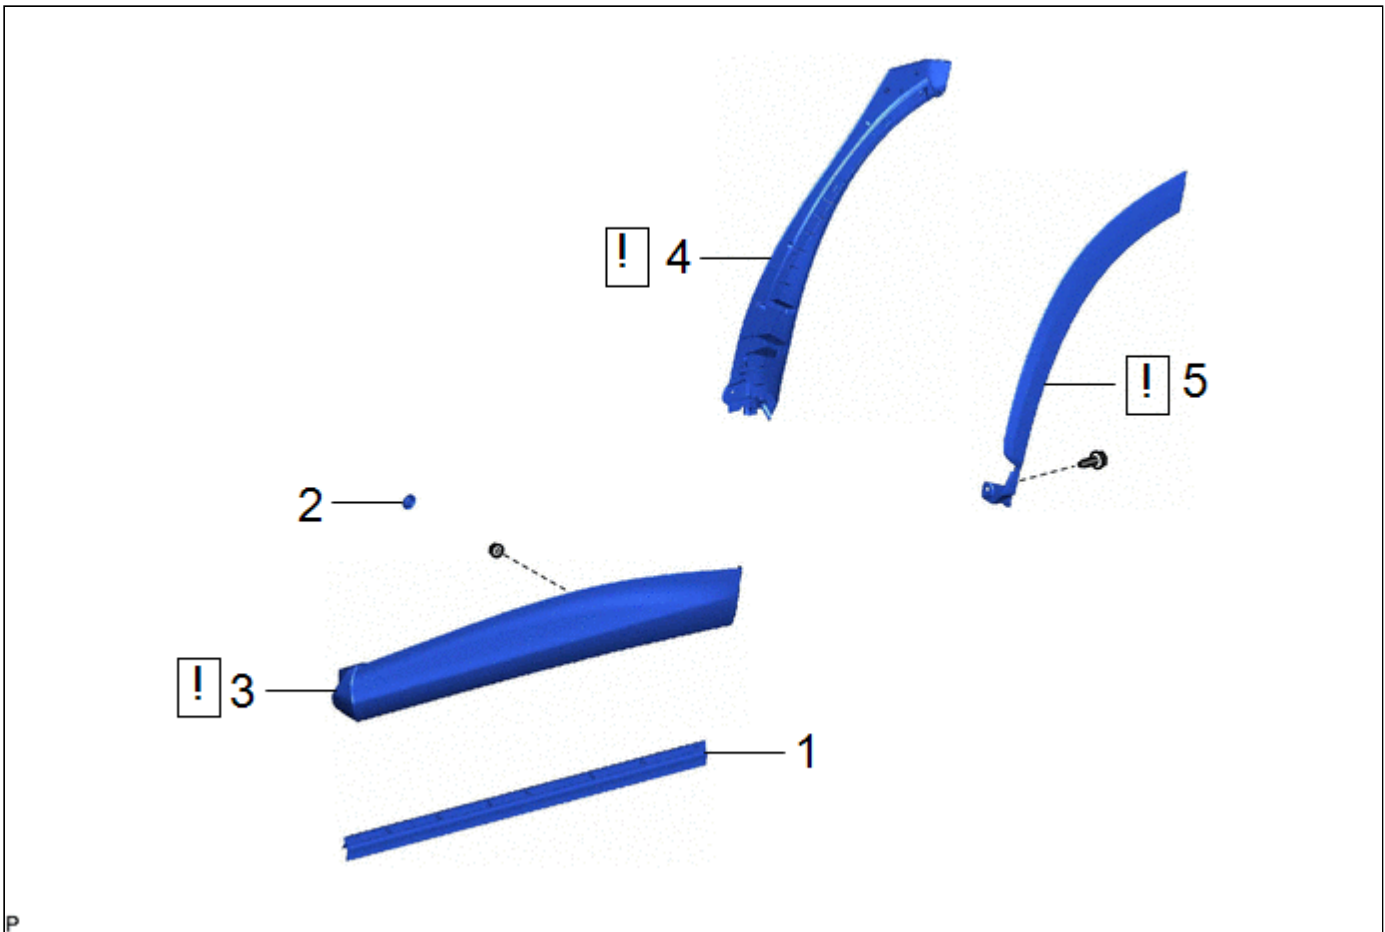COMPONENTS (REMOVAL)



	PROCEDURE	PART NAME CODE	!	✍	⚙
1	REAR DOOR NO. 4 WEATHERSTRIP	67898G	-	-	-
2	HOLE PLUG	-	-	-	-


	PROCEDURE	PART NAME CODE			
3	REAR DOOR LOWER OUTSIDE MOULDING SUB-ASSEMBLY	75078	INFO	-	-
4	REAR DOOR PANEL PROTECTOR	67858A	INFO	-	-
5	OUTSIDE MOULDING SET	75062	INFO	-	-

PROCEDURE


1. REMOVE REAR DOOR NO. 4 WEATHERSTRIP


Click here [INFO](#)

2. REMOVE HOLE PLUG

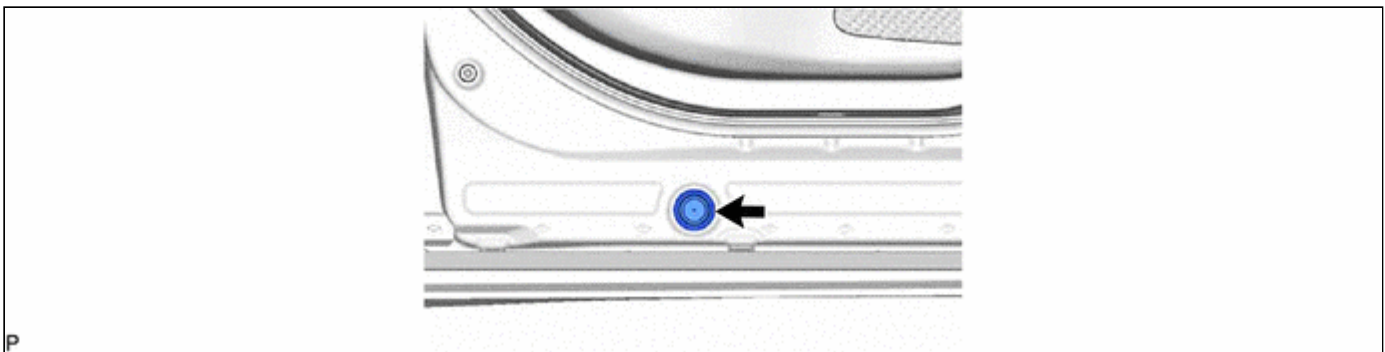


3. REMOVE REAR DOOR LOWER OUTSIDE MOULDING SUB-ASSEMBLY

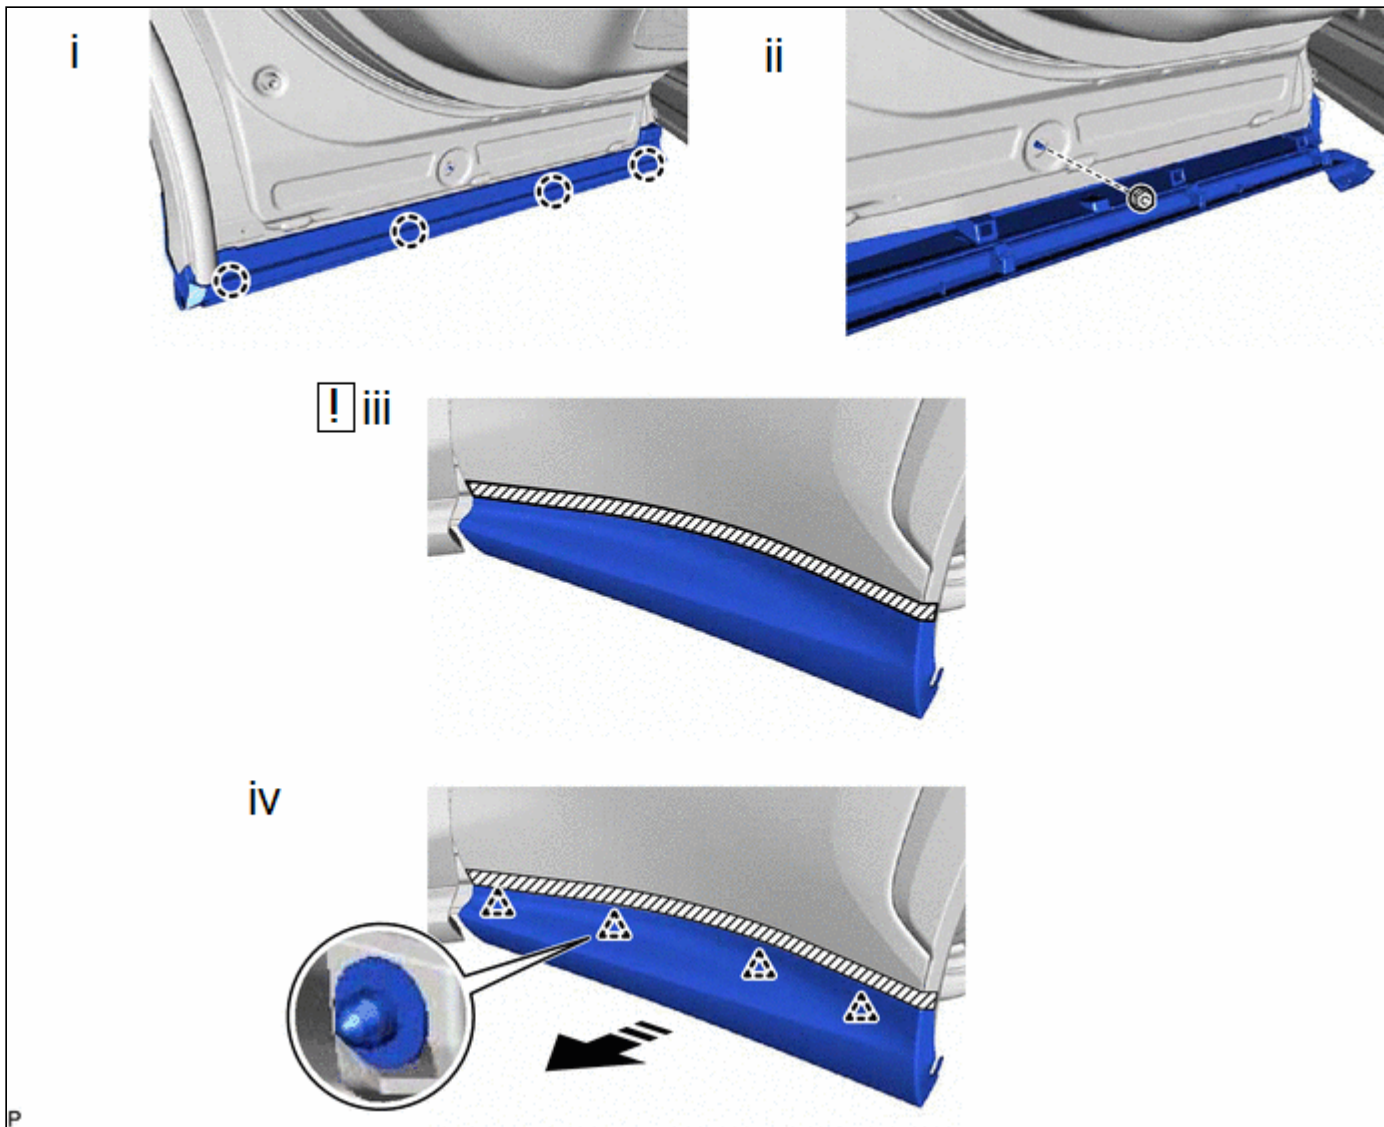


	Remove in this Direction	-	-
---	--------------------------	---	---

- (1) Disengage the 4 claws.
- (2) Remove the nut.
- (3) Apply protective tape around the rear door lower outside moulding sub-assembly as shown in the illustration.
- (4) Disengage the 4 clips and remove the rear door lower outside moulding sub-assembly as shown in the illustration.

4. REMOVE REAR DOOR PANEL PROTECTOR

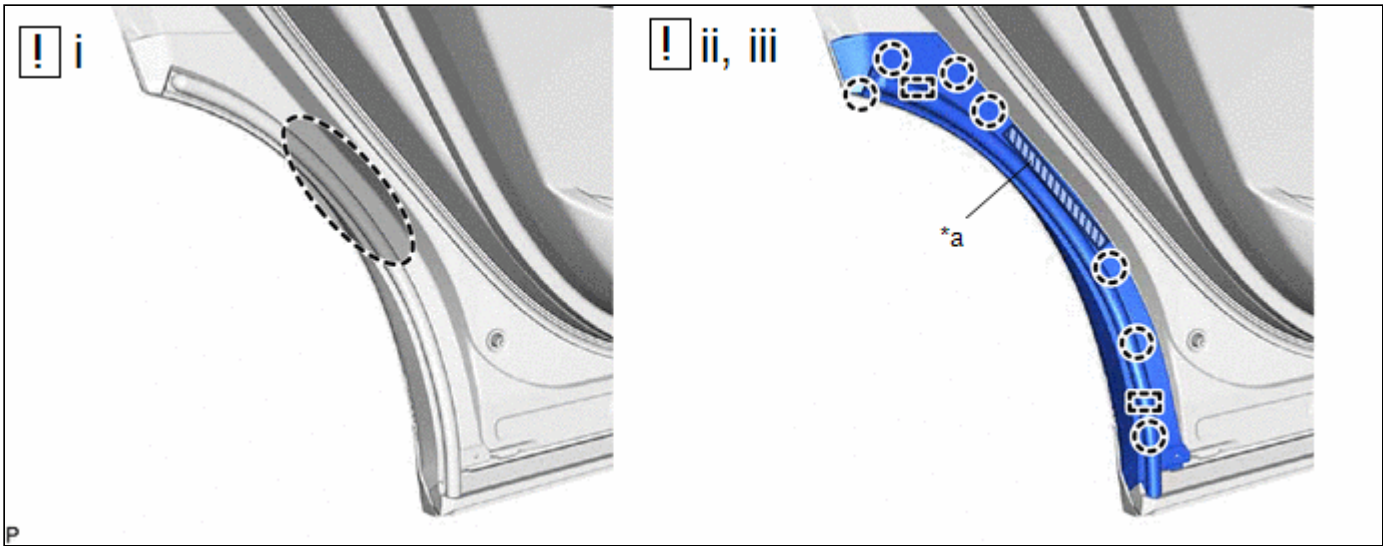

*a	Double-sided Tape	-	-
	Heating Area	-	-

(1) Clean the vehicle body surface.


1. Using a heat light, heat the double-sided tape remaining on the vehicle body and rear door panel protector.

Heating Temperature

AREA	TEMPERATURE	AREA	TEMPERATURE
Vehicle Body and Rear Door Panel Protector	40 to 60 °C (104 to 140 °F)	-	-

CAUTION:

- Do not touch the heat light and heated parts, touching the heat light may result in burns.
- Touching heated parts for a long time may result in burns.

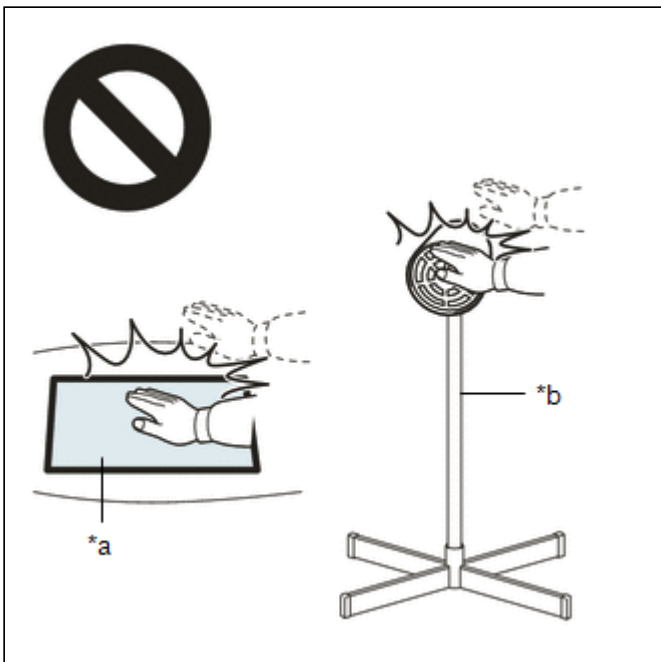


*a	Heated Part
*b	Heat Light

NOTICE:

Do not heat the vehicle body excessively.

- (2) Disengage the 7 claws, 2 guides and separate the double-sided tape to remove the rear door panel protector.
- (3) Remove any remaining double-sided tape from the vehicle body.

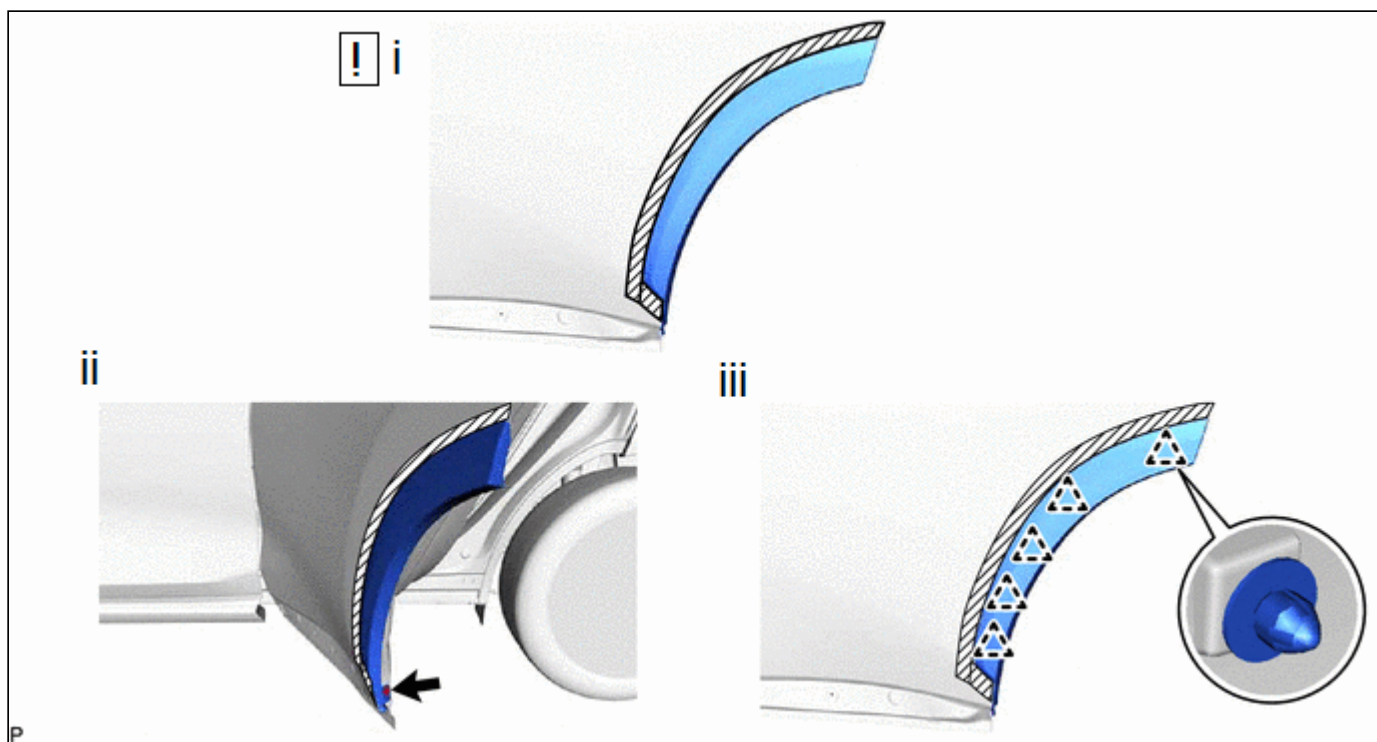5. REMOVE OUTSIDE MOULDING SET

- (1) Apply protective tape around the outside moulding set as shown in the illustration.
- (2) Remove the screw.
- (3) Disengage the 5 clips and remove the outside moulding set.

