

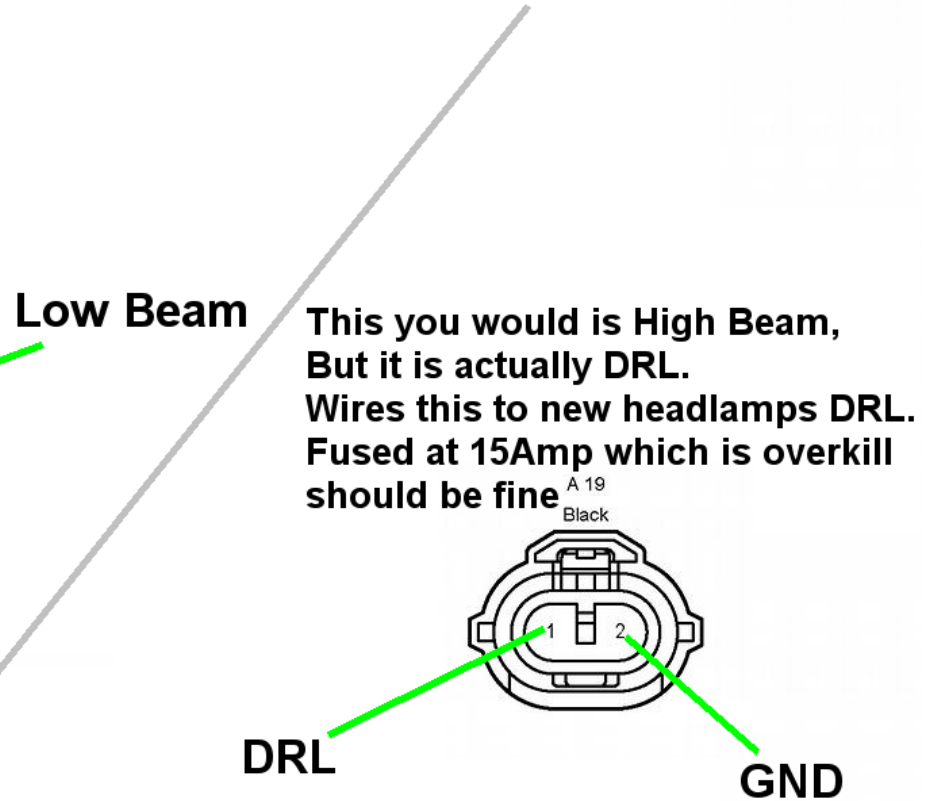


2010-2012 Bi-Xenon HID main Headlamp connector

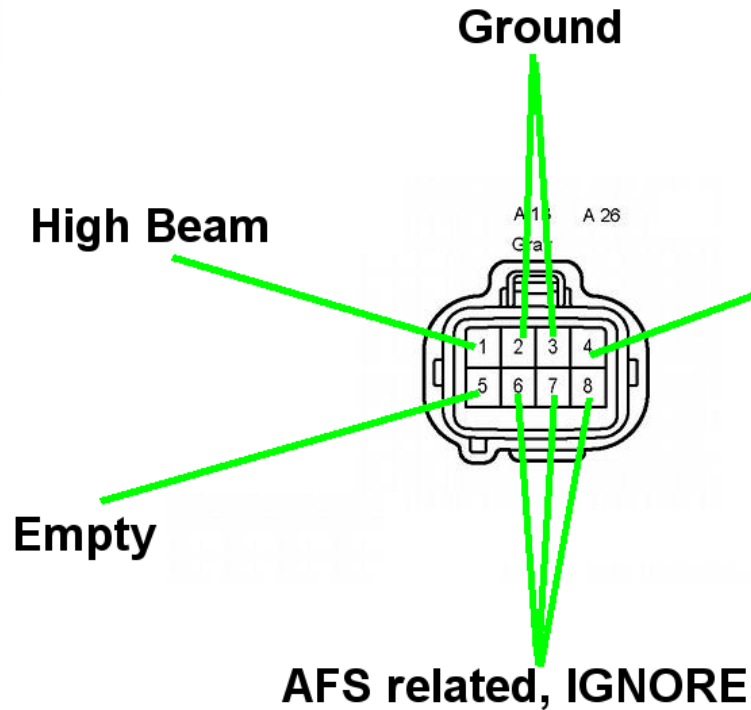

2013-2015 HID Headlamp

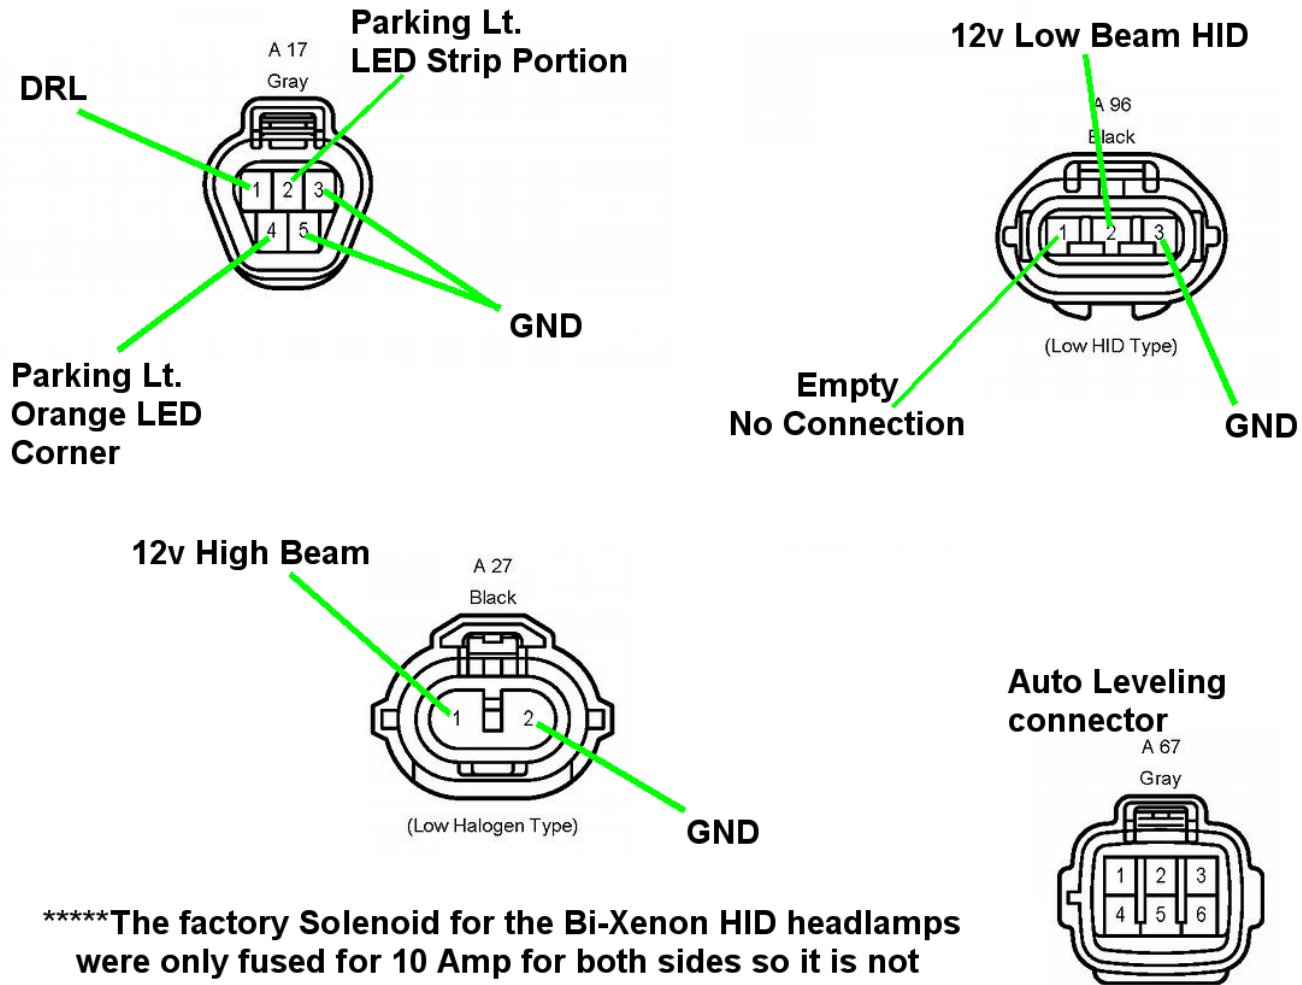

*****The factory Solenoid for the Bi-Xenon HID headlamps were only fused for 10 Amp for both sides so it is not good idea to use this circuit directly to power the High Beams

We Actually cut and used Factory DRL connector and wired our own External 40 Amp relay and Fused it at 30 Amps since the factory was 15amp each side. Used Bi-Xenon 12v as trigger for Relay instead for External Relay that powers the "High Beams" now.