

Subject		Market
GX460 Front Seatback Cover Service		USA
Service Category	Section	
Vehicle Interior	Seat	
Applicability		
2010-2014 GX460		

APPLICABLE VEHICLES

2010-2014	GX460
-----------	-------


CONDITION

The front seatback cover may have a loose fit due to damage of the retention clips following removal of the seatback for service.


RECOMMENDATIONS

Please use caution when removing/installing the seatback cover for service. Utilizing the Repair Manual procedure will ensure that there is minimum chance for damage during service.

REMOVAL

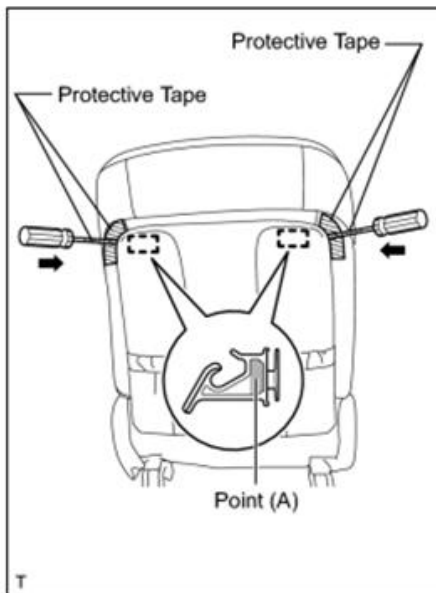


Use a screwdriver to apply force to clips at point A one side at a time.

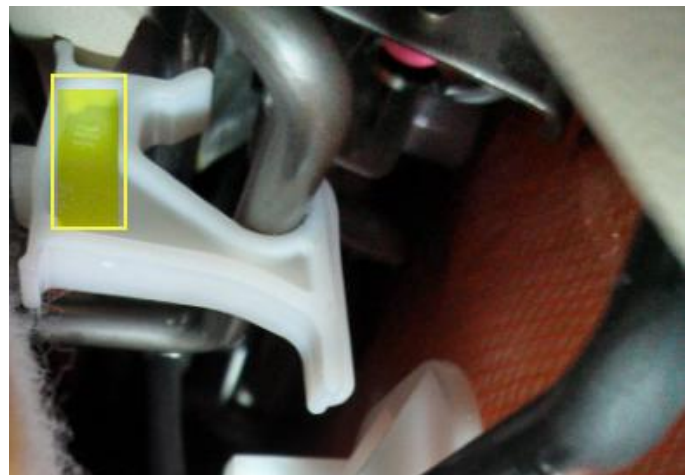


Point A from the RM highlighted

Driver Side Seatback cover with the clip engaged. View is from the center of the vehicle looking towards the door.

Subject	Market
GX460 Front Seatback Cover Service	USA
Applicability	
2010-2014 GX460	

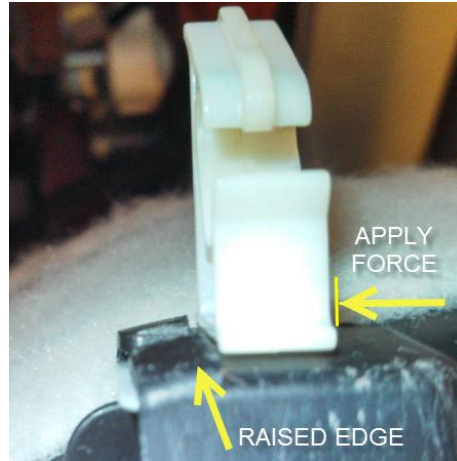RECOMMENDATIONS

1. Apply force at point A towards the center of the seatback cover to dismount the clip.
2. The clip must overcome the raised edge on the seatback cover that is used keep the clip in place.

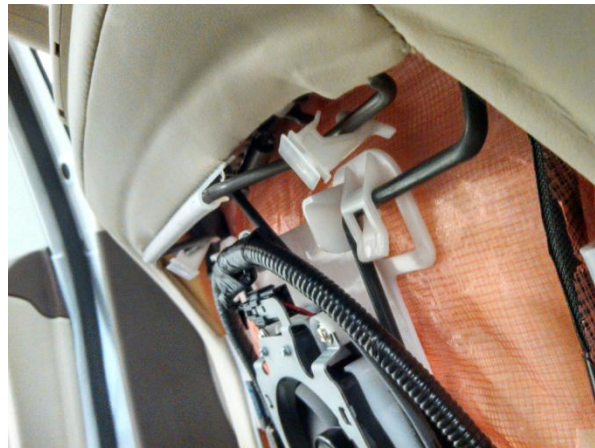


View of the clip once it has been successfully detached from the seatback cover

Subject	Market
GX460 Front Seatback Cover Service	USA
Applicability	
2010-2014 GX460	

RECOMMENDATIONSINSTALLATION

There is potential for the clip to become damaged during the installation of the seatback cover

Use caution when reinstalling the seat back cover to ensure that the clip is not damaged.

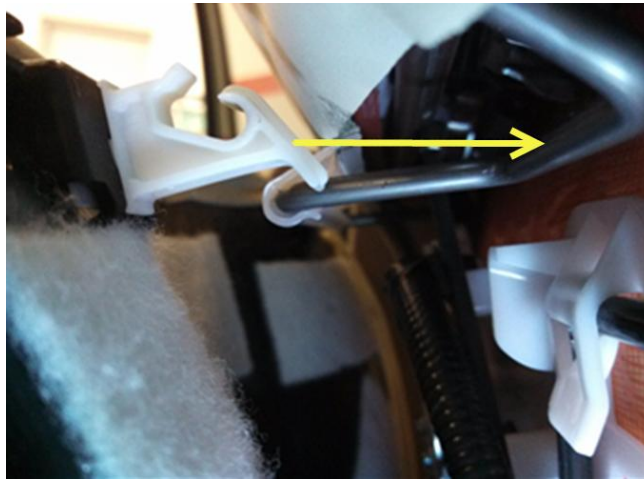**LINK REFERENCES**

1. [SEAT: FRONT SEAT ASSEMBLY: DISASSEMBLY; 2012 MY GX460 \[08/2011 - ???????\]](#)